

## Standard Configurations

- Overload Sensor and Alarm
- Tilt/Slope Sensors and Alarm
- Self-closing/Self-catching Gate
- Higher Platform Rails (Foldable)
- Solid Non-marking Tires
- Swing-out Component Trays
- Descent Protection and Alarm
- Flashing Beacons (Both Sides)
- Pothole Protectors
- Universal Control Box
- Quick Disconnect for Control Box
- Foot Pedal Extended Platform
- LED Battery Charging Indicator
- Lanyard Points
- Manual Brake Release
- Emergency Descent
- Horn and Hour Meter
- Full Height Drive
- Intelligent Diagnostic System
- AC Platform Power (GFCI)
- Charging Protection System
- Wind Rating Stickers

# ANSI A92.20 Slab Scissor Lifts

# LGMG

LGMG North America Inc.

# HYDRAULIC MOTOR DRIVE


## AS1932 Scissor Lift (Indoor/Outdoor)

- Hydraulic machines are the most affordable option
- Top-of-the-line hydraulic systems make these machines run smoothly
- Specifically designed ridges in the swing-out trays catch possible drips
- Tough, reliable, and built to last



### Product Specifications AS1932

Platform Capacity	510 lbs
Platform Occupants (Indoor/Outdoor)	2/1
Platform Height	19'
Machine Length	6'
Machine Width	2' 8"
Machine Height (Rails Up)	7'
Machine Height (Rails Down)	6'
Platform Extension	3'
Deck Extension Capacity	265 lbs
Drive Speed (Lowered)	2.2 Mph
Drive Speed (Elevated)	0.5 Mph
Lift Time	16 Secs
Lower Time	28 Secs
Gradeability	25%
Max Slope/Tilt	1.5°/3°
Amp Hours	(4) 6V x 225Ah
Maximum Ground Bearing Pressure	150 PSI
Tire Size	12" x 4.5"
Ground Clearance - Center	2.25"
Machine Weight	3,527 lbs

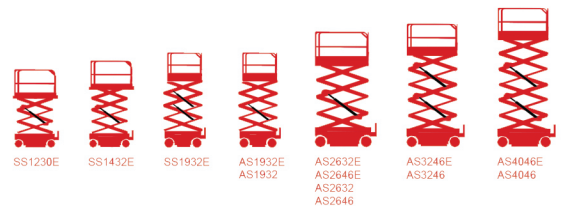

ANSI A92.20 Compliant



## LGMG North America Inc.

Address: 1445 Sheffler Drive, Chambersburg PA 17201

Email: [sales@lmgna.com](mailto:sales@lmgna.com)

Local Sales Contact: